

# HERACLES



# H160 H160T

# H160

## COMPACT POWER AND PRECISION

Introducing the H160: lightweight, and equipped with Avant quickhitch. Ideal for narrow spaces with high steering angle and hydraulic motors on each wheel. Perfect for diverse attachments, it ensures efficient performance in confined areas, making it a versatile asset for farms and job sites.



# H160T



## EXTENDED REACH, ENHANCED EFFICIENCY

We also offer the H160T: combines H160's agility with extended telescopic reach for elevated tasks. Lightweight and trailer-ready, it features Avant quickhitch for versatile attachment options. Ideal for jobs requiring height and precision, ensuring superior performance across agricultural, construction, and landscaping applications.






## **EFFICIENT HANDLING WITH AVANT QUICK HITCH**

The Avant quick hitch system, integral to our H160 series, revolutionizes efficiency with its seamless attachment swap capability. Designed for versatility, it supports a variety of tools tailored for every task—from heavy-duty buckets for material handling to specialized attachments for hay bales. Whether you're loading, transporting, or stacking, the H160 with Avant quick hitch ensures effortless maneuverability and precise operation, making it an indispensable asset on your farm or worksite.



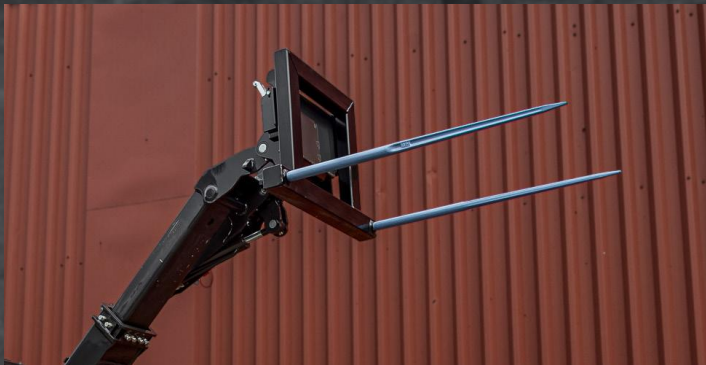




## EXPERIENCE THE POWER OF H160

Discover unparalleled agility and performance with the H160 series. From its compact design and high steering angle to the versatile Avant quick hitch system, the H160 excels in handling diverse tasks with ease. Perfect for navigating tight spaces and efficiently managing hay bales and other materials, this machine guarantees efficiency and reliability on every job.



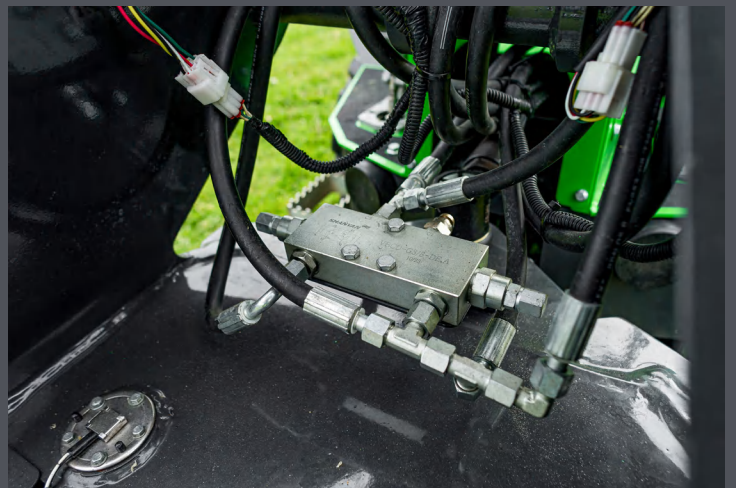



TECHNICAL DATA	H160
ENGINE MODEL	YANMAR 3TNV80F-SDWB
FUEL TYPE	DIESEL
CYLINDERS	3
DISPLACEMENT CC	1267
EMISSION STANDARDS	EU STAGE V & EPA TIER 4 FINAL
MAX ENGINE OUTPUT HP	24.4
MAX ENGINE TORQUE NM	60~64
COOLING SYSTEM	WATER
OPERATING VOLTAGE V	12
BATTERY AH	45
OPERATING WEIGHT KG	1180
MAX TIPPING LOAD KG	800
MAX LIFTING CAPACITY KG	600
CAB TYPE	CANOPY
TRAVEL SPEED KM/H	0~15
STEERING ANGLE	45
TURN RADIUS IN/OUT MM	940/2030
STANDARD TIRES	23X8.50-12NHS-4TL
FUEL TANK CAPACITY L	40
HYDRAULIC OIL TANK CAPACITY L	50
WORKING HYDRAULIC FLOW L/MIN	36
WORKING HYDRAULIC PRESSURE BAR	180
TRANSMISSION TYPE	HYDROSTATIC
TIRES SIZE	23X8.50-12NHS-4TL   24X12.00-12NHS-4TL
HEIGHT	2200   2415
WIDTH	1000   1200



## H160T

YANMAR 3TNV80F-SDWB

DIESEL

3

1267

EU STAGE V & EPA TIER 4 FINAL

24.4

60~64

WATER

12

45

1180

800

600

CANOPY

0~15

45

940/2030

23X8.50-12NHS-4TL

40

50

36

180

HYDROSTATIC

23X8.50-12NHS-4TL | 24X12.00-12NHS-4TL

2200 | 2215

1000 | 1200





**The H160** sets the standard for agility and performance in compact machines. With its low weight and high steering angle, navigating narrow spaces is effortless. Equipped with the Avant quickhitch as standard, it's perfect for tasks requiring precision and strength. Hydraulic motors on each wheel and optimized hydraulic functions ensure compatibility with a variety of attachments.

**The H160T** boasts extended lifting height and reach capabilities. This makes it ideal for jobs that require working at height or reaching over obstacles. Despite its enhanced capabilities, it remains lightweight and easy to transport on a trailer, ensuring flexibility in deployment across different sites.

**WEBPAGE:**

[www.heraclesloaders.com](http://www.heraclesloaders.com)

**EMAIL:**

[teddy@heraclesloaders.com](mailto:teddy@heraclesloaders.com)

2024 - V1  
**HERACLES**